





#### Features

- Wide input range 100~305VAC( Class I )
- Full power output at 70~100% Constant power mode operation
- Metal case with IP67, suitable for outdoor application
- LVLE (H type) Class 2 (24V) power unit
- Surge protection with 6KV/4KV (10KV/6KV optional)
- 3 in 1 dimming function (Dim to off and Isolation design)
- India (EESL) version with Input Over Voltage Protection can survive input voltage stress of 440Vac for 48 hours
- Protection functions: OVP/SCP/OCP/OTP
- Life time >50,000 hrs. and 5 years warranty


# Applications

- Skyscraper lighting
- · Street lighting
- Floodlight Lighting
- Stage lighting
- Fishing lighting
- · Horticulture lighting
- · Bay lighting
- DMX power supply
- Type HL for use in class I , Division 2

# Description

XLG-100 series is a 100W LED AC/DC driver featuring the constant power mode. XLG-100 operates from  $100{\sim}305\text{VAC}$  and offers models with different rated current ranging between 700mA and 8000mA. Thanks to the high efficiency up to 92%, with the fanless design, the entire series is able to operate for  $40{^\circ}\text{C}{^\circ}+90{^\circ}\text{C}$  case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XLG-100 series comply with the latest version of IEC61347/GB7000.1-2015 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

# Model Encoding

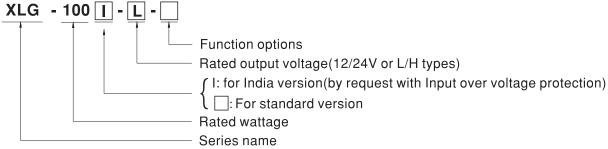

Туре	Function	Note
Blank	Io and Vo fixed. (For harsh environment)	By request
Α	lo adjustable via built-in potentiometer	In Stock
AB	Io adjustable via built-in potentiometer +3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock

Note: 12V and 24V models without the AB type



#### **SPECIFICATION**

MODEL		XLG-100□ -12-□	X	LG-100□-24-□				
DC VOLTAGE		12V	24	IV.				
	CONSTANT CURRENT REGION Note.2	8.4~ 12V	16	i.8~ 24V				
	RATED CURRENT	8A	4,	4				
	RATED POWER	96W	96	W				
	RIPPLE & NOISE (max.) Note.3	150mVp-p	24	0mVp-p				
	CURRENT AR LRANCE	Adjustable for A/AB-Type only (via the built-in potentiometer)						
	CURRENT ADJ RANGE	4 ~ 8A	2-	4A				
ОИТРИТ	VOLTAGE TOLERANCE Note.4	±3.0%	±	±2.0%				
	LINE REGULATION	±0.5%	±0.5%					
	LOAD REGULATION	±2%	±	1%				
	SETUP, RISE TIME Note.6	500ms, 100ms/230VAC, 1200ms, 100ms/115VAC						
	HOLD UP TIME (Typ.)	12ms/ 230VAC 12ms/ 115VAC						
	VOLTAGE RANGE Note.5	100 ~ 305VAC 142 ~ 431VDC						
	VOLIAGE NAME NOTE.S	(Please refer to "STATIC CHARACTERI	STIC" section)					
	FREQUENCY RANGE	47 ~ 63Hz						
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, P	PF≧0.92/277VAC@full load					
	TOTAL HARMONIC DISTORTION	THD< 10%(@load≧50%/115VC,230VA	AC; @load≧75%/277VAC)					
INPUT	EFFICIENCY (Typ.)	92%	9:	2%				
	AC CURRENT	1.1A / 115VAC 0.5A / 230VAC 0.4	2A/277VAC					
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300μs measu	ured at 50% Ipeak) at 230V	AC; Per NEMA 410				
	MAX. No. of PSUs on 16A	8units (circuit breaker of type B) / 14 un	its (circuit breaker of type	C) at 230VAC				
	CIRCUIT BREAKER	, ,		, , , , , , , , , , , , , , , , , , ,				
	LEAKAGE CURRENT	<0.75mA / 277VAC						
	NO LOAD	No load power consumption <0.5W	/(for standard version)					
	POWER CONSUMPTION		. (					
	OVER CURRENT	95 ~ 108%						
	OVER GORRENT	Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed						
	SHORT CIRCUIT	Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed						
PROTECTION	OVER VOLTAGE	13.5 ~ 18V 27 ~ 34V						
	0121(1021)(02	Shut down output voltage, re-power or						
	INPUT OVER VOLTAGE Note.7	7 320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is remove						
		can survive input voltage stress of 440Vac for 48 hours						
	OVER TEMPERATURE	Hiccup mode, recovers automatically after fault condition is removed						
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)						
	MAX. CASE TEMP.	Tcase=+90°C						
	WORKING HUMIDITY	20 ~ 95% RH non-condensing						
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +90℃, 10 ~ 95% RH						
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)						
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period fo						
	SAFETY STANDARDS Note.7	UL8750(type"HL"), UL879, CSA C22.2 No. 250.13-12; ENEC EN61347-1, EN61347-2-13 independent, EN62384;						
		GB19510.1, GB19510.14; EAC TP TC 004;IS15885(Part2/Sec13)(for XLG-100I type only); IP67 approved						
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC						
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms /		I				
	EMC EMISSION	Parameter	Standard	Test Level/Note				
		Conducted	EN55015(CISPR15),					
		Radiated	EN55015(CISPR15),					
		Harmonic Current	EN61000-3-2, GB/T1	9				
EMC		Voltage Flicker	EN61000-3-3					
SAFETY &	EMC IMMUNITY	EN61547	04	T41(M-4-				
		Parameter ESD	Standard EN61000-4-2	Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact				
		Radiated	EN61000-4-2	Level 3				
		EFT/Burst	EN61000-4-3	Level 3				
			EN61000-4-5					
		Surge Conducted	EN61000-4-5	4KV/Line-Line 6KV/Line-Earth(6K/10K op Level 3				
		Magnetic Field	EN61000-4-8	Level 4				
		wagnetic Field	LINU 1000-4-8					
		Voltage Dips and Interruptions	EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 period >95% interruptions 250 periods				
		1						
	MTRE	1006 16K hre min Tolografia CD 222	(Rellcore) : 276 27/h	min MII -HDBK-217E (25°C)				
)TUEPS	MTBF	1006.16K hrs min. Telcordia SR-332	(Bellcore); 276.37Khrs	min. MIL-HDBK-217F (25°C)				
OTHERS	MTBF DIMENSION PACKING	1006.16K hrs min. Telcordia SR-332 140*63*32mm (L*W*H) 0.58Kg;24pcs /15Kg /0.85CUFT	(Bellcore); 276.37Khrs	nin. MIL-HDBK-217F (25°C)				

- 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

  4. Tolerance : includes set up tolerance, line regulation and load regulation.

  5. De-rating may be needed under low inplut voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.

  6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.

  7. Input voltage only for XLG-100 I series, and I series without UL/CSA certificate.

  8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

  9. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

  10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com

- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
  11. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to) point (or TMP, per DLC), is about 80°C or less.
  12. Products sourced from the Americas regions may not have the PSE/COC/BIS/KC logo. Please contact your MEAN WELL sales for more information.
  13. For any application note and IP water proof function installation caution, please refer our user manual before using.
  https://www.meanwell.com/Upload/PDF/LED\_EN.pdf

- 14. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains.




## **SPECIFICATION**

MODEL		XLG-100 🔲 -L- 🔲		XLG-100 🗌 -H- 🗌					
	RATED CURRENT	700mA		2100mA					
	RATED POWER	100W		100W					
	CONSTANT CURRENT REGION	71 ~ 142V		27 ~ 56V					
	FULL POWER CURRENT RANGE	700~1050mA		1750~2780mA					
OUTPUT	OPEN CIRCUIT VOLTAGE (max.)	149V		60V					
	CURRENT ADJ. RANGE	350~1050mA		875~2780mA					
	CURRENT RIPPLE	3.0%(@rated current)	·						
	CURRENT TOLERANCE	±5%							
	SET UP TIME	500ms/230VAC, 1200ms/115VAC							
		100 ~ 305VAC 142VDC ~ 431VD0							
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" ang "DRIVING METHODS OF LED MODULE"section)							
	FREQUENCY RANGE	47 ~ 63Hz							
		PF≥0.97 / 115VAC, PF≥0.95 / 230VAC, PF≥0.92 / 277VAC at full load							
	POWER FACTOR (Typ.)	(Please refer to "Power Factor Characteristic" section)							
		THD< 10% (@ load ≥ 50% at 115VAC/230VAC ,@load ≥ 75% at 277VAC) Please refer to "TOTAL HARMONIC DISTORTION (THD)" section							
	TOTAL HARMONIC DISTORTION								
INPUT	EFFICIENCY (Typ.)	92.5% 91%							
INFO	AC CURRENT (Typ.)	1.1A / 115VAC							
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300µs measur		: Per NEMA 410					
	MAX. NO. of PSUs on 16A		·						
	CIRCUIT BREAKER	8 unit(circuit breaker of type B) / 14 un	8 unit(circuit breaker of type B) / 14 units(circuit breaker of type C) at 230VAC						
-	LEAKAGE CURRENT	<0.75mA / 277VAC							
		OLIGHEN ZITANO							
	STANDBY POWER CONSUMPTION	Standby power consumption <0.5	W for AB-Type(Dimmin	g OFF)(for standard	version)				
		105 ~ 150%							
	OVER POWER	Hiccup mode, recovers automatically a	after fault condition is remo	wed					
	SHORT CIRCUIT	Hiccup mode or Constant current limiti			removed				
	SHORT CIRCUIT				removed				
	OVER VOLTAGE	160 ~ 220V		66 ~ 90V					
PROTECTION		Shut down output voltage, re-power on to recover							
	INPUT OVER VOLTAGE Note.7	320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed can survive input voltage stress of 440Vac for 48 hours							
	OVER TEMPERATURE	Hiccup mode, recovers automatically after fault condition is removed							
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)							
	MAX. CASE TEMP.	Tcase=+90°C		,					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing							
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-condensing							
	TEMP. COEFFICIENT	±0.03%°C (0~60°C)							
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes							
	VID.U.I.V.I.	UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC EN61347-1, EN61347-2-13 independent, EN62384;							
	SAFETY STANDARDS Note.7	GB19510.1, GB19510.14; EAC TP TC 004; IS15885(Part2/Sec13)(for XLG-100I type only):IP67 approved							
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC	, ,	o)(.c. /(20 / too. t)po c	my/iii or approved				
SAFETY &	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms		H					
EMC		Parameter	Standard		Test Level/Note				
	EMC EMISSION	Conducted	EN55015(CISPR15	i) GB/T17743					
		Radiated	EN55015(CISPR15	,					
		Harmonic Current	EN61000-3-2 ,GB/	, -	Class C @load≥50%				
		Voltage Flicker	EN61000-3-3						
		EN61547							
		Parameter	Standard		Test Level/Note				
	EMC IMMUNITY	ESD	EN61000-4-2		Level 3, 8KV air ; Level 2, 4KV contact				
		Radiated	EN61000-4-3		Level 3				
		EFT/Burst	EN61000-4-4		Level 3				
		Surge	EN61000-4-5		4KV/Line-Line 6KV/Line-Earth(6K/10K option				
		Conducted	EN61000-4-6		Level 3				
		Magnetic Field	EN61000-4-8		Level 4				
					>95% dip 0.5 periods, 30% dip 25 periods,				
		Voltage Dips and Interruptions	EN61000-4-11		>95% interruptions 250 periods				
	MTBF	1006.16K hrs min. Telcordia SR-332	2 (Bellcore); 276.37Kh	rs min. MIL-HDBK-2	17F (25°C)				
OTHERS	DIMENSION	140*63*32mm (L*W*H)							
	PACKING	0.58Kg;24pcs /15Kg /0.85CUFT							
NOTE	Please refer to "DRIVING MET     Ripple & noise are measured a     Tolerance : includes set up tole     De-rating may be needed unde     Length of set up time is measu     Input voltage only for XLG-100     The driver is considered as a complete installation, the final of     The ambient temperature dera	ers NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.  To "DRIVING METHODS OF LED MODULE".  Is are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. includes set up tolerance, line regulation and load regulation.  In the properties of the set up tolerance, line regulation and load regulation.  In the set up tolerance, line regulation and load regulation.  In the set up tolerance, line regulation and load regulation.  In the set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.  In e only for XLG-100 I series, and I series without UL/CSA certificate.  In so considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the stallation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.  In temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). The to the warranty statement on MEAN WELL's website at http://www.meanwell.com  In the set of the warranty statement on MEAN WELL's website at http://www.meanwell.com  In the set of the warranty statement on the set of the set of the set of the warranty statement on the set of the set of the warranty statement on the set of th							



#### ■ BLOCK DIAGRAM


PFC fosc: 50~120KHz PWM fosc: 60~130KHz

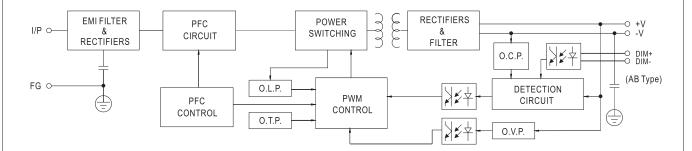

#### ■ DRIVING METHODS OF LED MODULE


#### **%** I-V Operating Area

#### 

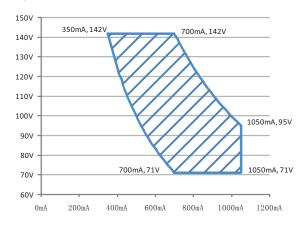

Recommend Performance Region


#### 

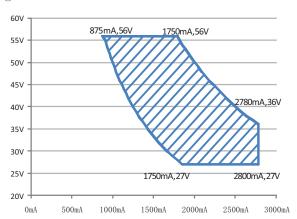

Recommend Performance Region

## 


This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

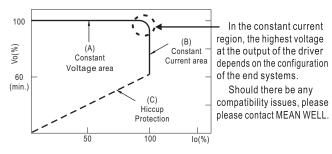

Typical output current normalized by rated current (%)




## ■ DIMMING OPERATION

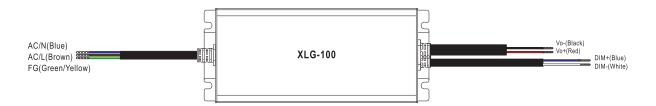


## $\divideontimes$ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100  $\mu$  A (typ.)

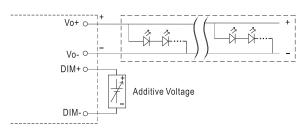


"DO NOT connect "DIM- to Vo-"

Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

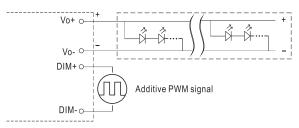



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

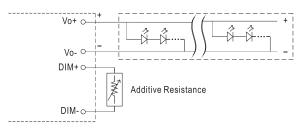

"DO NOT connect "DIM- to Vo-"









Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



## ■ OUTPUT LOAD vs TEMPERATURE

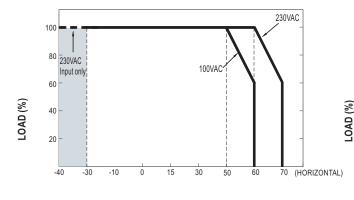

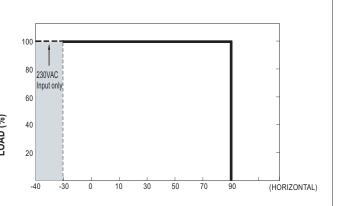

AMBIENT TEMPERATURE, Ta (°C)

Tcase (°C)


If XLG-100 operates in Constant Current mode with the rated current the maximum workable Ta is  $60\,^\circ$ C (Typ. 230VAC) or  $50\,^\circ$ C (Typ. 100VAC) Below 110VAC@ -30 $^\circ$ C may retry to 2nd setup


## ■ STATIC CHARACTERISTIC

# **■ POWER FACTOR (PF) CHARACTERISTIC**

※ Tcase at 75°

C

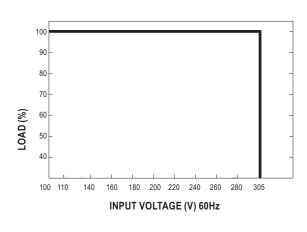

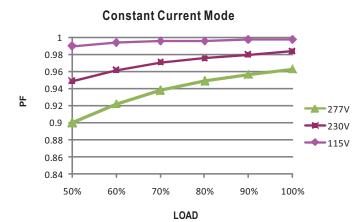


# ■ TOTAL HARMONIC DISTORTION (THD)


#### **■** EFFICIENCY vs LOAD



XLG-100 series possess superior working efficiency that up to 92.5% can be reached in field applications.


※ XLG-100-L Model, Tcase at 75℃

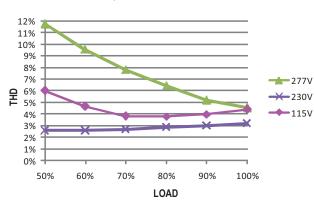

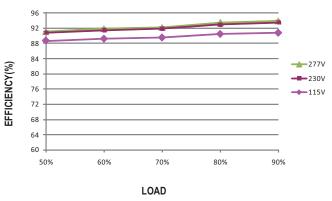




# ■ LIFE TIME

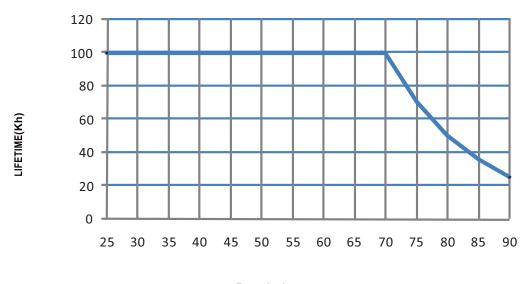


Tcase (°€)



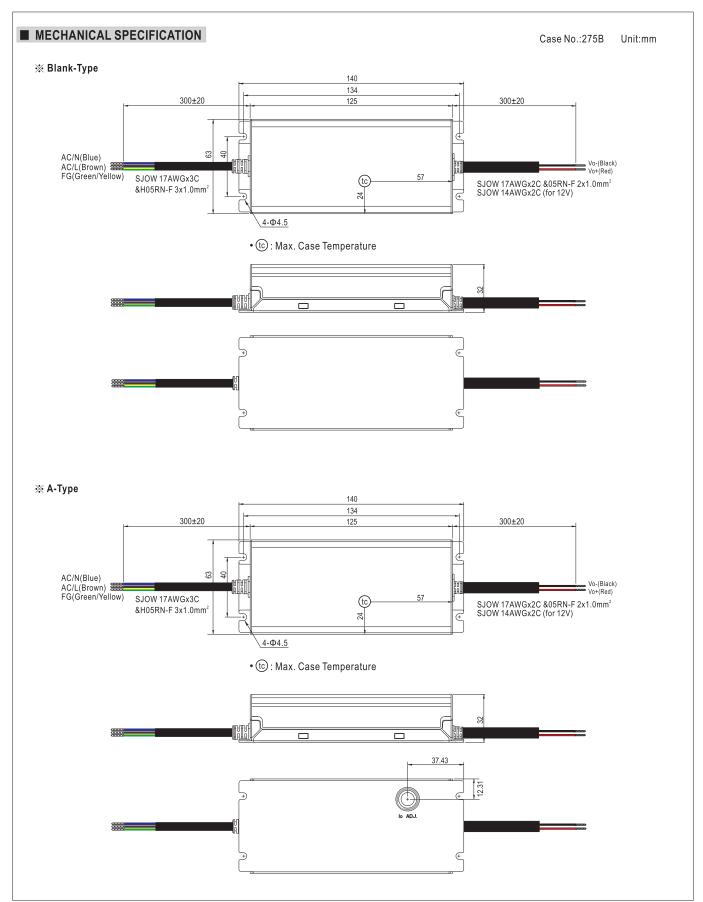




## ※ AB-Type

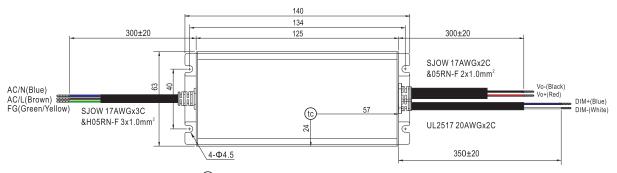

• tc : Max. Case Temperature

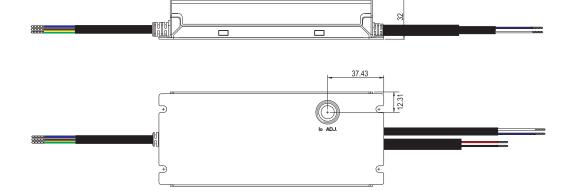

# **■ INSTALLATION MANUAL**

Please refer to : http://www.meanwell.com/manual.html